


SmokeTip®

MiniSub® INSTRUCTIONS

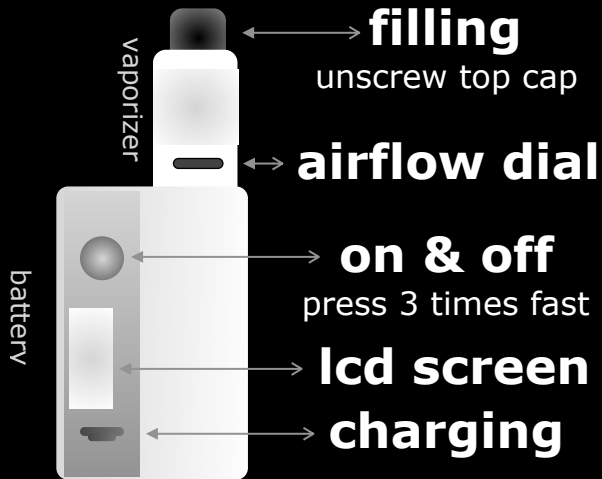

- 1 fill
- 2 turn on
- 3 vape

Charging Insert the supplied charging cord and connect to your choice of power supply. The LCD display will indicate CH while charging. While vaping, the LCD screen will display the battery power remaining in volts 1-4 volts, 4 volts being the maximum charge. As with any electrical device, charge on a stable fire-resistant surface clear of debris. Do not leave unattended for long periods of time.

Adding Liquid Simply unscrew the top cap and fill along the side of the liquid tank, avoiding the center air flow tube. Please do not fill past the large center pillar (80%) to avoid leakage.

Changing the Atomizer Pressing the power button a second time will display the atomizer ohms and it's condition. When vapor production or flavor decreases (normally every 40-60ml of liquid) remove the vaporizer from the battery and unscrew the bottom air flow chamber. Unscrew the atomizer counter clockwise & replace with a new atomizer. Once fully reassembled, place 6-8 drops of liquid into the top mouthpiece hole to "prime" the atomizer. Once the atomizer is initially soaked, it is ready for continual use.

AirFlow Dial You can adjust the airflow and control vapor production by turning the air flow dial.

Drip Tip All units are equipped with a unique flavor drip tip. If you like, you can drip 4-10 drops of liquid directly through the top mouthpiece without removing it to enjoy a more robust flavor. The tank does not have to be filled with any liquid to drip.

Other

Never over tighten any components - lightly snug fit all pieces to avoid damage. All components except the atomizer and battery can be rinsed under warm water. The battery can be cleaned with a soft damp cloth and fully dried before use. For full specifications of your particular SmokeTip Vaporizer and video instructions, please visit our website at SmokeTip.com